




modern karton

Beyaztestliner

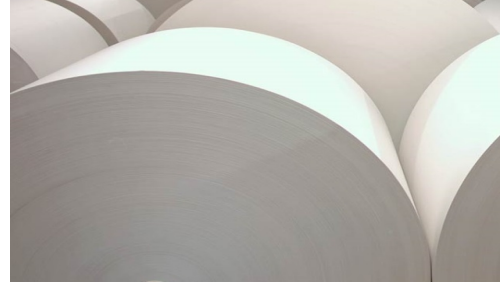

TİPİK DEĞERLER

TEST	Metot	Birim	BEYAZ TESTLINER		
Gramaj	T 410	g/m ²	115	125	140
Rutubet	T 412	%	8,0	8,0	8,0
SCT CD	T 826	kN/m	1,50	1,87	2,07
SCT CD indeksi	T 826	kN.m/g	13,0	14,9	14,8
Patlama	T 403	kPa	205	255	283
Cobb60	T 441	g/m ²	35	35	35
Bendtsen Roughness	ISO 8791-2	ml/dak	500	500	500
Brightness	T 525	%	69	69	69

GARANTİ EDİLEN DEĞERLER

TEST	Metot	Birim	Tolerans	BEYAZ TESTLINER		
Gramaj	T 410	g/m ²	% ± 5,5	115	125	140
Rutubet	T 412	%	± 1,5	8,0	8,0	8,0
SCT CD	T 826	kN/m	min	1,40	1,55	1,70
SCT CD indeksi	T 826	kN.m/g	min	12,2	12,4	12,1
Patlama	T 403	kPa	min	190	210	230
Cobb60	T 441	g/m ²	± 10	40	40	40
Bendtsen Roughness	ISO 8791-2	ml/dak	max	750	750	750
Brightness	T 525	%	min	65	65	65

Test şartları

23±1°C, 50% ± 2% RH

ISO 9001:2015
ISO 14001:2015
OHSAS 18001:2007
ISO 50001:2011
TS 12728



The mark of
responsible forestry

Geçerlilik tarihi: Nisan 2018'den itibaren